




SL5050

25 Watt* / CRI 82+ / 2050 lm

- High efficiency LED chip
- Effective thermal management
- Multiple types of installation
- Various colour temperature, module length options
- C-TICK and SAA approved
- Flexible length and shape modules

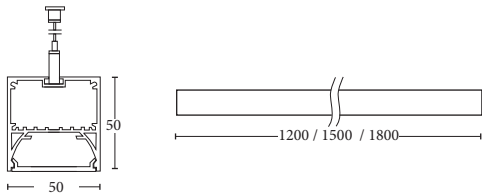

Available trim colour:



PERFORMANCE:

LED Power	25 W/m
Luminous Flux	2050 lm
Efficiency	82 lm/W
Color Rendering Index	82+
Power Factor	> 0.90
Dimming	Optional

GENERAL INFORMATION:



LED Type	SMD
Driver System	Lifud LED Driver
Size	W50 mm x H50 mm
IES File	Available
Warranty	2 Years

PRODUCT OPTION:

Beam Angle Selection	120°
Colour Temperature	3000K / 4000K / 5000K
Module Length	1200 mm / 1500 mm / 1800 mm


PHOTOMETRIC DATA

SL5050/25W/3000K/120°

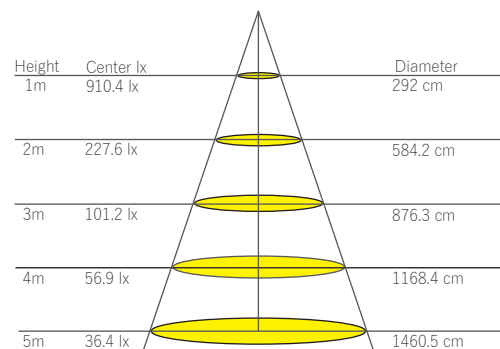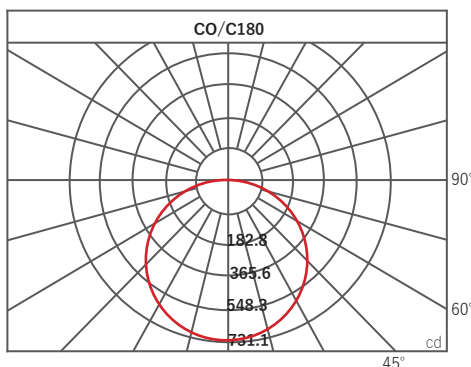


*25 Watt per meter


INSTALLATION METHOD:

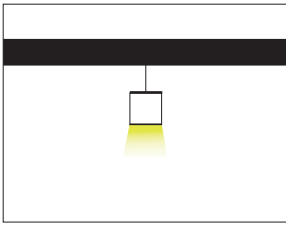


SUSPENDED

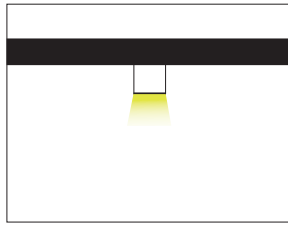

SURFACE MOUNTED

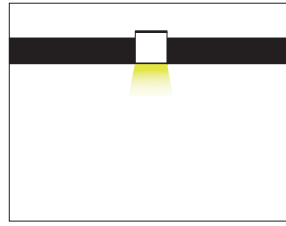

RECESSED



ALUMINUM SIDE PASS

CONNECTION MODULE

MODULE NAME	MODULE SHAPE	SIZE(LxWxH, mm)
L SHAPE		305X50X50
T SHAPE		250X50X50
X SHAPE		250X50X50
Y SHAPE		282X50X50
120° SHAPE		317X50X50